


R/W LINE AT OR 2' BACK OF SIDEWALK PLAN (30" MAX.)

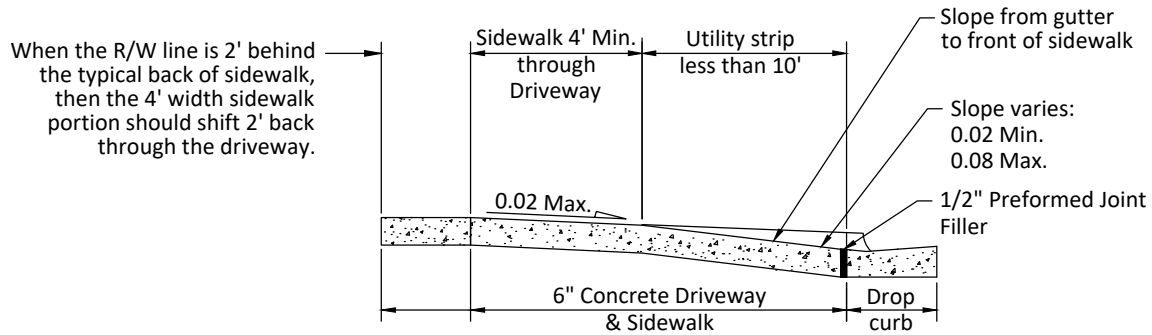

SECTION BB

Notes:

1. Slopes can be adjusted within the ranges shown to improve ties to adjacent property and are to be transitioned so as to avoid distortion in sidewalk continuity and meet A.D.A. requirements
2. Concrete shall be 3,000 psi. @ 28 days
3. Light broom finish

WHEN DISTANCE BETWEEN CURB AND SIDEWALK IS LESS THAN 10', COMPLY WITH FLORIDA DEPARTMENT OF TRANSPORTATION (FDOT) "CONCRETE FLARED DRIVEWAYS" STANDARDS PLANS, INDEX 522-003

LATEST REVISION 2019	GENERAL CONSTRUCTION - CONCRETE DRIVEWAY APRONS, CONT.	STANDARD DETAIL
	CITY OF WEST PALM BEACH - ENGINEERING SERVICES	GC-6