
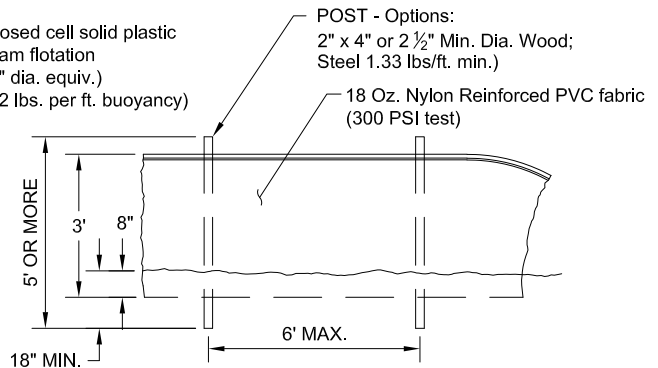


1. D1=5' STD. (Single panel for depths 5' or less. D2=5' STD. (additional panel for depths > 5').
2. Curtain to reach bottom up to depths of 10 feet. Two panels to be used for depths greater than 10 feet unless special depth curtains specifically called for in the plans or as determined by the engineer.



3. NOTICE:

Components of Types I and II may be similar or identical to proprietary designs. Any infringement on the proprietary rights of the designer shall be the sole responsibility of the user. Substitutions for Types I and II shall be as approved by the engineer.

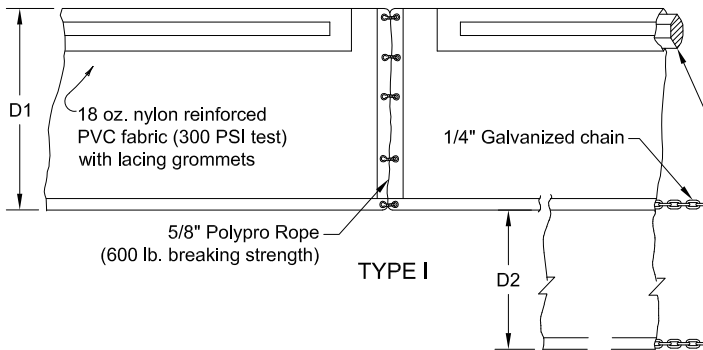

FLOATING TURBIDITY BARRIERS

STAKED TURBIDITY BARRIER

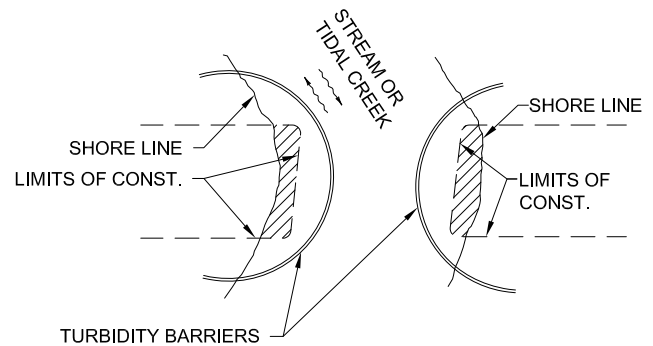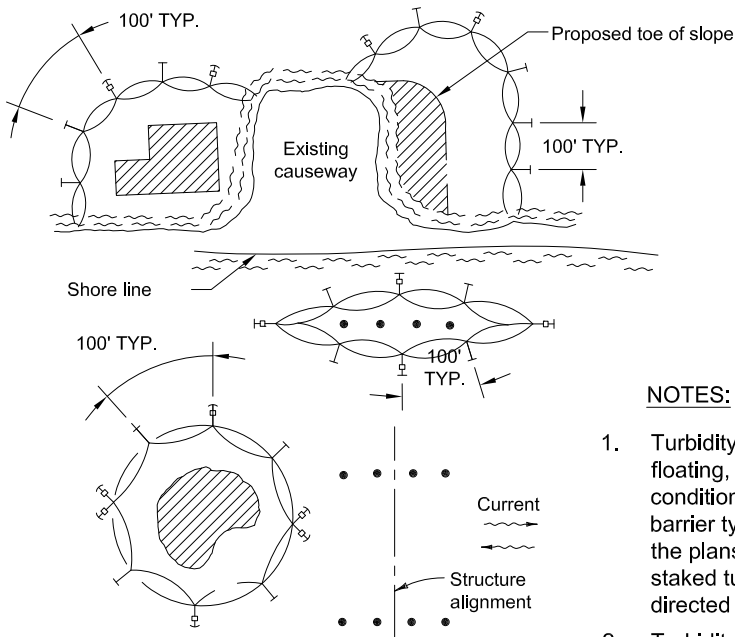

TURBIDITY BARRIER APPLICATIONS

LEGEND

- PILE LOCATIONS
- ▨ DREDGE OR FILL AREA
- ⊙ MOORING BUOY W/ANCHOR
- ANCHOR
- ⊖ BARRIER MOVEMENT DUE TO CURRENT ACTION

NOTES:

1. Turbidity barriers for flowing streams and tidal creeks may be either floating, or staked types or any combination of types that will suit site conditions and meet erosion control and water quality requirements. The barrier type(s) will be at the contractor's option unless otherwise specified in the plans for floating turbidity barrier and/or staked turbidity barrier. Posts in staked turbidity barriers to be installed in vertical position unless otherwise directed by the engineer.
2. Turbidity barriers are to be used in all permanent bodies of water regardless of water depth.
3. Number and spacing of anchors dependent on current velocities.
4. Deployment of barrier around pile locations may vary to accommodate construction operations.
5. Navigation may require segmenting barrier during construction operations.
6. For additional information refer to the Florida Stormwater Erosion and Sedimentation Control Inspector's Manual.

REVISED:
JUNE-2016



POLLUTION CONTROL - FLOATING TURBIDITY BARRIER

STANDARD
DETAIL


ISSUED:
2016

CITY OF WEST PALM BEACH

PC-1

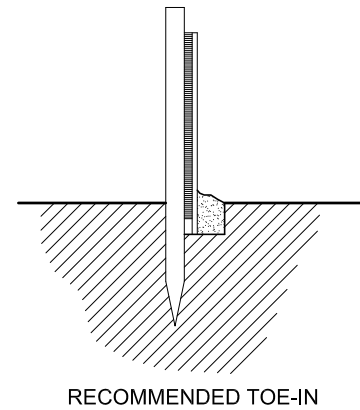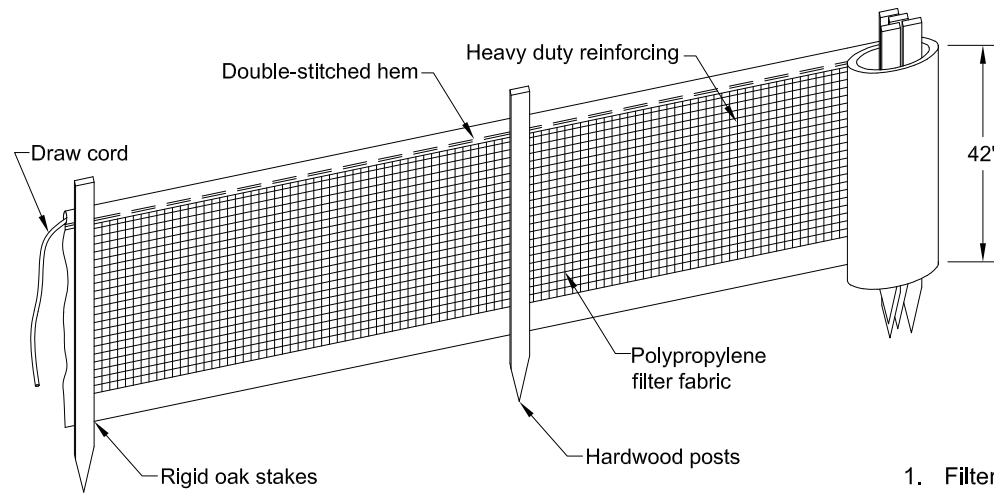

1. Filter fabric fence to be fastened securely to fence posts with wire ties or staples.
2. Filter cloth to be fastened securely to posts with ties spaced every 24 inches at top and mid-section.
3. When two sections of filter cloth adjoin each other they shall be overlapped by six inches and folded.
4. Maintenance shall be performed as needed and material removed when "bulges" develop in the silt fence or depth of accumulated sediment reaches 6 inches.
5. Silt fence shall be installed per manufacturer's specifications prior to the start of construction and shall not be removed until construction is complete.
6. The contractor shall inspect and repair the silt fence after each rain event and remove sediment when necessary.
7. Removed sediment shall be deposited in an area that will not contribute to offsite sediment and can be permanently stabilized.
8. The silt fence shall be placed on slope contour to maximize its ponding efficiency.
9. If ditch level is deeper than 30", then a floating silt screen shall be used.
10. Refer to the Florida Stormwater Erosion and Sedimentation Control Inspector's Manual for additional information.

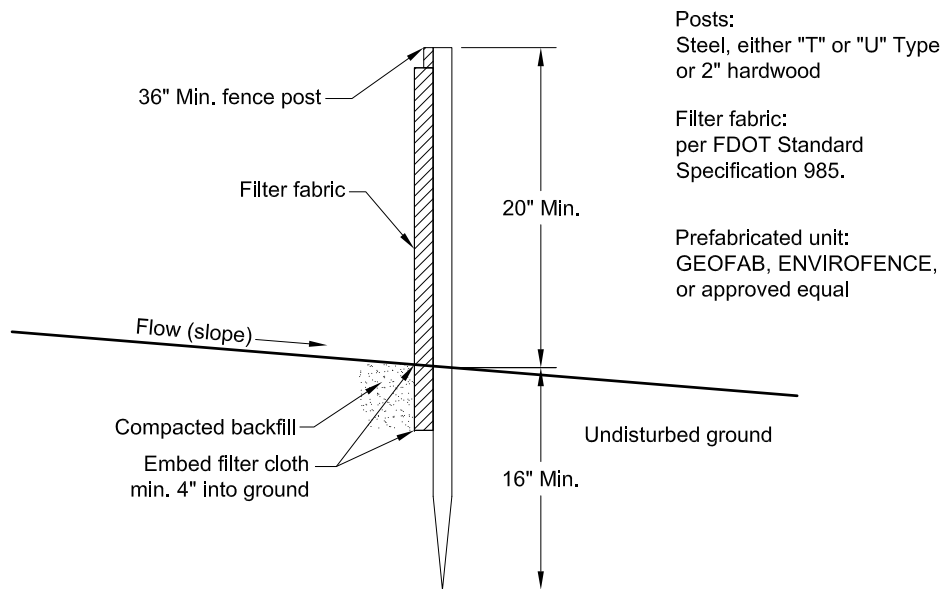

Posts:
Steel, either "T" or "U" Type
or 2" hardwood

Filter fabric:
per FDOT Standard
Specification 985.

Prefabricated unit:
GEOFAB, ENVIROFENCE,
or approved equal

REVISED:
JUNE-2016


POLLUTION CONTROL - TURBIDITY BARRIER SILT FENCE

STANDARD
DETAIL

ISSUED:
2016

CITY OF WEST PALM BEACH

PC-2

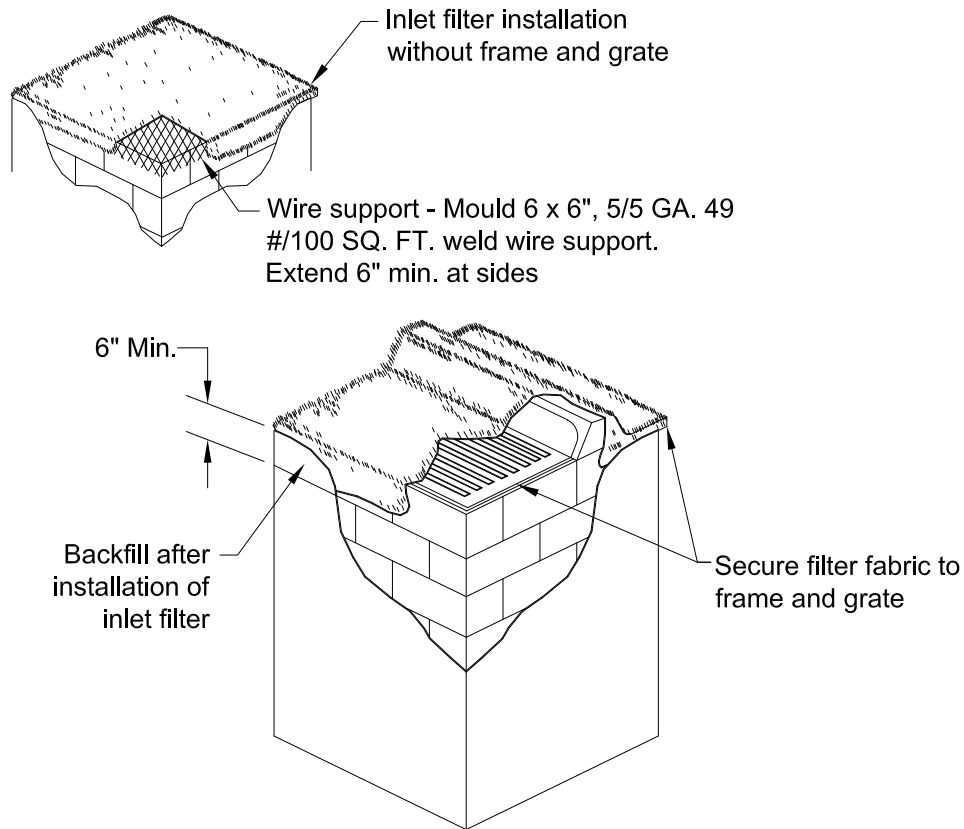

NOTES:

NOT TO SCALE

1. Contractor is to clean inlet filter after every storm.
2. Contractor to remove fabric just prior to paving
3. A sediment trap will be excavated behind the curb at the inlet. Basin shall be at least 12 to 14 inches in depth, approximately 36 inches in width and approximately 7 to 10 feet in length parallel to the curb.
4. Storm water will reach the sediment trap via curb cuts adjacent to side of the inlet structure. These openings shall be at least 12 inches in length. Storm water may also reach the basin via overland flow land area behind the curb. The curb cuts shall be repaired when the sediment trap is removed.

INLET FILTER DETAIL

REVISED: JUNE-2016	POLLUTION CONTROL - INLET PROTECTION INSTALLATION	STANDARD DETAIL
ISSUED: 2016	CITY OF WEST PALM BEACH	PC-3