


PLAN VIEW

1. Walls must be landscaped with hedge material planted at 2 ft. intervals.
2. All hardware to be hot dipped galvanized.
3. Each door shall be equipped with a pin to help secure the door when opened.
4. Min. 3 inch deep pin holes needed in the asphalt for each door to help secure the doors when fully opened at a 90° + angle.
5. Doors shall be hinged from outside the posts.

ENCLOSURE WALL MATERIAL OPTIONS:

1. Concrete block with brick
2. 8" (x 8" x 16") C.M.U. with ASTM A951 Approved joint reinforcement 16" c/c
3. Board on Board fence panel

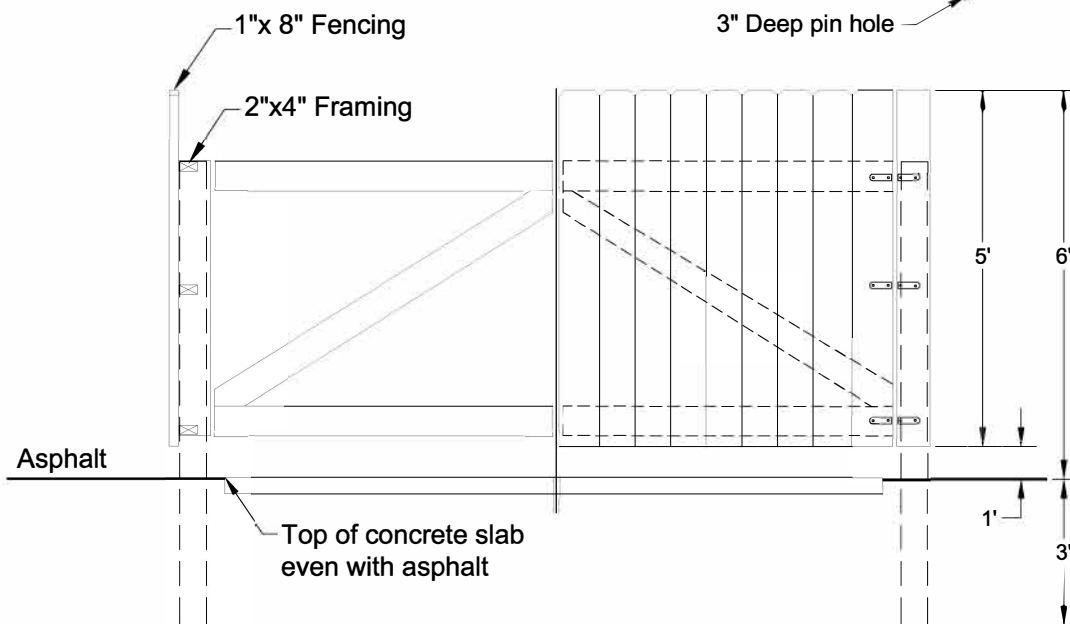

FRONT VIEW

ISSUED: SEPT - 2009	GENERAL CONSTRUCTION - GARBAGE DUMPSTER ENCLOSURE	STANDARD DETAIL
REVISED: OCT - 2020	CITY OF WEST PALM BEACH ENGINEERING SERVICES DEPT.	GC-7